PREDICTED ENERGY ASSESSMENT



DAI, Plot 33, Sweet Hill, Southwell, Portland,


Dorset, DT5 Dwelling type: House, End-Terrace

Date of assessment: 09/03/2023
Produced by: Resi Resolve
Total floor area: 105.46 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

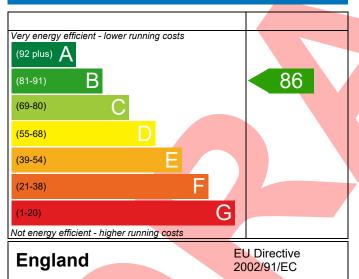

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

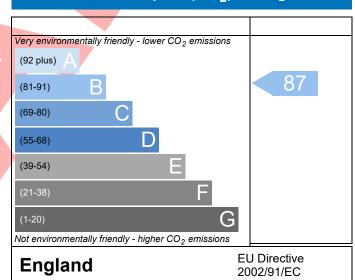

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference		3			T Df	Issued on Date	09/03/202	
Assessment Reference	001			Pi	rop Type Ref	DAI		
Property	DAI, Plot 33, Swe	et Hill, Sout	:hwell, Port	land, Dorset, DT5	;			
SAP Rating			86 B	DER	15.29	TER	24.97	
Environmental			87 B	% DER <ter< td=""><td></td><td>38.78</td><td></td></ter<>		38.78		
CO ₂ Emissions (t/year)			1.32	DFEE	42.00	TFEE	52.46	
General Requireme	nts Compliance		Pass	% DFEE <tfee< td=""><td></td><td>19.93</td><td></td></tfee<>		19.93		
Assessor Details Mrs. Georgina O'Connor, Resi Resolve, Tel: 07748778047, georgie@resi- Assessor ID								
	resolve.co.uk							
Client	Koori Limited, KOO							
UMARY FOR INPUT	DATA FOR New Build	d (As Desigr	ned)					
riterion 1 – Achievi	ng the TER and TFEE r	ate						
a TER and DER								
Fuel for main hea	ting		Electricit	у				
Fuel factor			1.55 (ele	ctricity)				
Target Carbon Die	oxide Emission Rate (1	ΓER)	24.97 kgCO ₂ /n					
Dwelling Carbon Dioxide Emission Rate (DER)			15.29		kgCO ₂ /m ²	Pass		
			-9.68 (-3	8.8%)		kgCO ₂ /m ²		
b TFEE and DFEE								
Target Fabric Energy Efficiency (TFEE)			52.46			kWh/m²/yr		
Dwelling Fabric Energy Efficiency (DFEE)		i)	42.00			kWh/m²/yr		
			-10.5 (-2	0.0%)		kWh/m²/yr	Pass	
riterion 2 – Limits c								
Limiting Fabric St	andards							
2 Fabric U-values								
Element		Average		H	lighest			
External w	all	0.21 (ma	ax. 0.30)	0	.21 (max. 0.70	0)	Pass	
Party wall		0.00 (max. 0.20)		-			Pass	
Floor		0.11 (max. 0.25			.11 (max. 0.70	•	Pass	
Roof		0.11 (ma			.17 (max. 0.3	Pass		
Openings		1.27 (ma	ax. 2.00)	1	.30 (max. 3.30	Pass		
2a Thermal bridg								
	ing calculated from li	near therm	al transmit	ances for each ju	nction			
3 Air permeabilit	Y							
Air permeability at 50 pascals			4.50 (design value) m ³ /(h.m ²) @ 50 P				a	
	Maximum							

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Heat pump with radiators or underfloor - Electric Vaillant aroTHERM 5kW VWL 55/3 A 230v	
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	Measured cylinder loss: 1.42 kWh/day Permitted by DBSCG 2.30	Pass
Primary pipework insulated	Yes	Pass
<u>6 Controls</u>		
Space heating controls	Time and temperature zone control	Pass
Hot water controls	Cylinderstat	Pass
	Independent timer for DHW	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy fittings	100 %	
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in summ	mer	
9 Summertime temperature		
Overheating risk (Southern England)	Not significant	Pass
Based on:		
Overshading	Average	
Windows facing North East Windows facing South West	8.42 m², No overhang 5.66 m², No overhang	
Air change rate	8.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent with DE	R and DFEE rate	
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m ² K	Pass
Air permeability and pressure testing		
3 Air permeability		
Air permeability at 50 pascals	4.50 (design value) m ³ /(h.m ²) @ 50 Pa	
Maximum	10.0 m³/(h.m²) @ 50 Pa	Pass
10 Key features		
Party wall U-value	0.00 W/m²K	
Roof U-value	0.10 W/m ² K	
Floor U-value	0.11 W/m²K	
Door U-value	1.10 W/m²K	
Door U-value	1.00 W/m²K	
Thermal bridging y-value	0.034 W/m²K	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£205	B 88	B 89	Recommended
Photovoltaic	£3,500 - £5,500	£779	A 97	A 97	Recommended
Wind turbine			0	0	Not applicable
Totals	f7.500 - f11.500	f984	Δ 97	Δ 97	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

