PREDICTED ENERGY ASSESSMENT




DAI, Plot 34, Sweet Hill, Southwell, Portland, Dorset, DT5 Dwelling type: Date of assessment: Produced by: Total floor area:

House, Mid-Terrace 09/03/2023 Resi Resolve 105,46 m²


This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO_2) emissions.

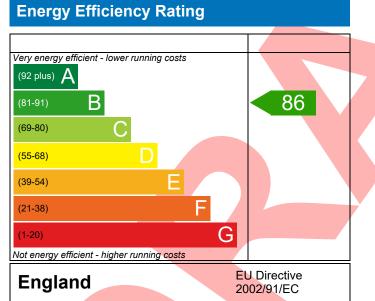

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating



The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO_2) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)

Design SAP elmhurst energy

Reference					TE			
Property	DAI, Plot 34, Sweet	Hill, South	nwell, Por	tland, Dorset, D	15			
SAP Rating			86 B	DER	14.41	TER	23.55	
Environmental			88 B	% DER <ter< th=""><th></th><th>38.80</th><th></th></ter<>		38.80		
CO₂ Emissions (t/year)			1.24	DFEE	36.96	TFEE	47.69	
General Requirements Compliance			Pass	% DFEE <tfee< td=""><td colspan="2">E<tfee 22.4<="" td=""><td></td></tfee></td></tfee<>	E <tfee 22.4<="" td=""><td></td></tfee>			
	1rs. Georgina O'Conno esolve.co.uk	r, Resi Re	solve, Tel:	: 07748778047, ;	georgie@resi-	Assessor ID	T293-0001	
Client	oori Limited, KOO							
UMARY FOR INPUT D	ATA FOR New Build (A	As Design	ed)					
riterion 1 – Achieving	the TER and TFEE rate	е						
a TER and DER								
Fuel for main heatir	ng		Electrici	ty				
Fuel factor	-		1.55 (ele	ectricity)				
Target Carbon Diox	ide Emission Rate (TER	R)	23.55			kgCO ₂ /m ²		
Dwelling Carbon Dioxide Emission Rate (DER)			14.41			kgCO ₂ /m ²	Pass	
			-9.14 (-3	38.8%)		kgCO ₂ /m ²		
b TFEE and DFEE								
Target Fabric Energy Efficiency (TFEE)			47.69			kWh/m²/yr		
Dwelling Fabric Ene	rgy Efficiency (DFEE)		36.96			kWh/m²/yr		
			-10.7 (-2	22.4%)		kWh/m²/yr	Pass	
riterion 2 – Limits on				_				
Limiting Fabric Star	ndards							
2 Fabric U-values								
Element		Average			Highest			
External wal		0.21 (ma			0.21 (max. 0.7	0)	Pass	
Party wall		0.00 (ma			-		Pass	
Floor		0.11 (ma			0.11 (max. 0.7		Pass	
Roof			(max. 0.20) 0.17 (max. 0.35				Pass	
	Openings 1.27 (max. 2.00) 1.30 (max. 3.30)					Pass		
2a Thermal bridgin								
	g calculated from linea	artherma	I transmit	tances for each	Junction			
<u>3 Air permeability</u>								
Air permeability at 50 pascals			4.50 (design value)			m ³ /(h.m ²) @ 50 Pa		
Maximum			10.0			m³/(h.m²) @ 50 Pa	a Pass	
Limiting System Eff								

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Heat pump with radiators or underfloor - Electric Vaillant aroTHERM 5kW VWL 55/3 A 230v	
Secondary heating system	None	
5 Cylinder insulation		
Hot water storage	Measured cylinder loss: 1.42 kWh/day	Pass
	Permitted by DBSCG 2.30	
Primary pipework insulated	Yes	Pass
<u>6 Controls</u>		
Space heating controls	Time and temperature zone control	Pass
Hot water controls	Cylinderstat	Pass
	Independent timer for DHW	Pass
7 Low energy lights		
Percentage of fixed lights with low-energy fittings	100 %	
Minimum	75 %	Pass
8 Mechanical ventilation		
Not applicable		
Criterion 3 – Limiting the effects of heat gains in su	mmer	
9 Summertime temperature		
Overheating risk (Southern England)	Not significant	Pass
Based on:		
Overshading	Average	
Windows facing North East	8.42 m ² , No overhang	
Windows facing South West	5.66 m ² , No overhang	
Air change rate	8.00 ach	
Blinds/curtains	None	
Criterion 4 – Building performance consistent with	DER and DFEE rate	
Party Walls		
Туре	U-value	
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass
Air permeability and pressure testing		
<u>3 Air permeability</u>		
Air permeability at 50 pascals	4.50 (design value) m ³ /(h.m ²) @ 50 Pa	
Máximum	10.0 m³/(h.m²) @ 50 Pa	Pass
<u>10 Key features</u>		
Party wall U-value	0.00 W/m ² K	
Roof U-value	0.10 W/m ² K	
Floor U-value	0.11 W/m²K	
Door U-value	1.10 W/m ² K	
Door U-value	1.00 W/m²K	
•		

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£205	B 89	В 90	Recommended
Photovoltaic	£3,500 - £5,500	£779	A 98	A 98	Recommended
Wind turbine			0	0	Not applicable
	67 500 614 500	6005		1.00	
Totals	£7,500 - £11,500	£985	A 98	A 98	
4					

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19