PREDICTED ENERGY ASSESSMENT



ROS, Plot 48, Sweet Hill,


Southwell, Portland, Dorset, DT5 Dwelling type: House, Semi-Detached

Date of assessment: 13/03/2023
Produced by: Resi Resolve
Total floor area: 102.93 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

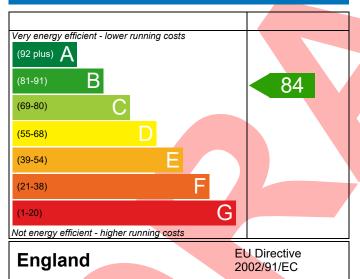

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

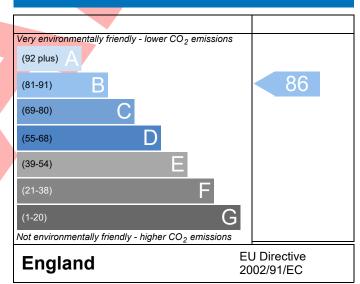

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference KOO/0	002/23 048				Issued on Date	13/03/2023	
Assessment 001							
Reference							
Property ROS, P	lot 48, Sweet Hill, Sc	outhwell, Por	tland, Dorset, DT5				
SAP Rating		84 B	DER	16.66	TER	27.12	
Environmental		86 B	% DER <ter< td=""><td></td><td>38.58</td><td></td></ter<>		38.58		
CO ₂ Emissions (t/year)		1.39	DFEE	48.91	TFEE	59.58	
General Requirements Complia	ance	Pass	% DFEE <tfee< td=""><td></td><td>17.92</td><td></td></tfee<>		17.92		
Assessor Details Mrs. Georg	gina O'Connor, Resi	Resolve, Tel:	07748778047, ged	orgie@resi-	Assessor ID	T293-0001	
resolve.co.							
Client Koori Limit	ted, KOO						
SUMARY FOR INPUT DATA FOR	New Build (As Desi	gned)					
Criterion 1 – Achieving the TER	and TFEE rate						
1a TER and DER							
Fuel for main heating		Electricit	у				
Fuel factor		1.55 (ele	ctricity)				
Target Carbon Dioxide Emiss	ion Rate (TER)	27.12					
Dwelling Carbon Dioxide Emission Rate (DER)		16.66	Pass				
		-10.46 (-	38.6%)		kgCO ₂ /m ²		
1b TFEE and DFEE							
Target Fabric Energy Efficiency (TFEE)		59.58			kWh/m²/yr		
Dwelling Fabric Energy Efficion	ency (DFEE)	48.91	9 00/1		kWh/m²/yr		
Critorian 2 Limits on design fil	ovibility	-10.7 (-1	8.0%)		kWh/m²/yr	Pass	
Criterion 2 – Limits on design flo	exibility		•				
Limiting Fabric Standards							
2 Fabric U-values							
Element	Avera			ghest		Dana	
External wall Party wall		max. 0.30) max. 0.20)	0	21 (max. 0.70))	Pass	
Floor			0.	11 (may 0.70	1)	Pass Pass	
Roof		(max. 0.25) 0.11 (max. 0.70)			,	Pass	
Openings		(max. 0.20) 0.18 (max. 0.35) (max. 2.00) 1.30 (max. 3.30)				Pass	
3 6 3 63			1	,	'	. 433	
2a Thermal bridging	1.20 (1						
2a Thermal bridging Thermal bridging calculate		mal transmitt	ances for each iun	nction			
Thermal bridging calculat		mal transmitt	ances for each jur	nction			
Thermal bridging calculates 3 Air permeability	ted from linear ther			nction	m³/(h.m²) @ 50 P	a	
Thermal bridging calculat	ted from linear ther		ances for each jur	nction	m ³ /(h.m ²) @ 50 P m ³ /(h.m ²) @ 50 P		

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system Heat pump with radiators or underfloor - Electric Vaillant aroTHERM 5kW VWL 55/3 A 230v			
Secondary heating system	None		
5 Cylinder insulation			
Hot water storage	Measured cylinder loss: 1.42 kWh/day Permitted by DBSCG 2.30	Pass	
Primary pipework insulated	Yes	Pass	
<u>6 Controls</u>			
Space heating controls	Time and temperature zone control	Pass	
Hot water controls	Cylinderstat	Pass	
	Independent timer for DHW	Pass	
7 Low energy lights			
Percentage of fixed lights with low-energy fittings	100 %		
Minimum	75 %	Pass	
8 Mechanical ventilation			
Not applicable			
Criterion 3 – Limiting the effects of heat gains in sur	mmer		
9 Summertime temperature			
Overheating risk (Southern England)	Not significant	Pass	
Based on:			
Overshading	Average		
Windows facing South East	8.86 m ² , No overhang		
Windows facing North West	6.17 m², No overhang		
Air change rate	8.00 ach		
Blinds/curtains	None		
Criterion 4 – Building performance consistent with	DER and DFEE rate		
Party Walls			
Туре	U-value		
Filled Cavity with Edge Sealing	0.00 W/m²K	Pass	
Air permeability and pressure testing			
3 Air permeability			
Air permeability at 50 pascals	4.50 (design value) m ³ /(h.m ²) @ 50 Pa		
Maximum	10.0 m³/(h.m²) @ 50 Pa	Pass	
10 Key features			
Party wall U-value	0.00 W/m ² K		
Roof U-value	0.10 W/m²K		
Floor U-value	0.11 W/m²K		
Door U-value	1.10 W/m²K		
Door U-value	1.00 W/m²K		

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£205	B 87	B 88	Recommended
Photovoltaic	£3,500 - £5,500	£779	A 96	A 96	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£984	A 96	A 96	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

