PREDICTED ENERGY ASSESSMENT



SOF, Plot 36, Sweet Hill,


Southwell, Portland, Dorset, DT5 Dwelling type: House, End-Terrace

Date of assessment: 13/03/2023
Produced by: Resi Resolve
Total floor area: 115.26 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

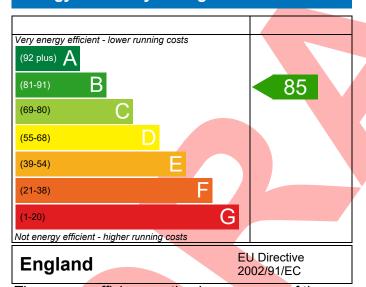

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

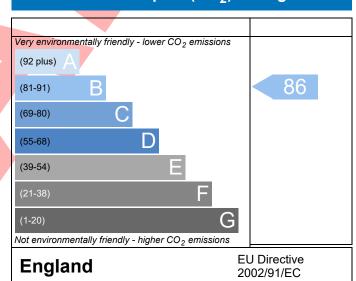

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference		00			wan Tuna Baf	Issued on Date	13/03/202	
Assessment Reference	001			P	rop Type Ref	SUF		
Property	SOF, Plot 36, Swe	eet Hill, Sou	thwell, Por	tland, Dorset, DT	5			
SAP Rating			85 B	DER	15.56	TER	25.46	
Environmental			86 B	% DER <ter< td=""><td></td><td>38.88</td><td></td></ter<>		38.88		
CO₂ Emissions (t/year)			1.43	DFEE	47.30	TFEE	57.92	
General Requireme	nts Compliance		Pass	% DFEE <tfee< td=""><td></td><td>18.34</td><td></td></tfee<>		18.34		
Assessor Details Mrs. Georgina O'Connor, Resi Resolve, Tel: 07748778047, georgie@resi- Assessor								
	resolve.co.uk							
Client	Koori Limited, KOO							
UMARY FOR INPUT	DATA FOR New Buil	d (As Desig	ned)					
riterion 1 – Achievi	ing the TER and TFEE	rate						
a TER and DER								
Fuel for main heating			Electricity					
Fuel factor			1.55 (ele	ctricity)				
Target Carbon Dioxide Emission Rate (TER)			25.46	kgCO ₂ /m ²				
Dwelling Carbon Dioxide Emission Rate (DER)			15.56		kgCO ₂ /m ²	Pass		
			-9.90 (-3	8.9%)		kgCO ₂ /m ²		
b TFEE and DFEE								
_	ergy Efficiency (TFEE)		57.92			kWh/m²/yr		
Dwelling Fabric Energy Efficiency (DFEE)		Ξ)	47.30			kWh/m²/yr		
			-10.6 (-1	8.3%)		kWh/m²/yr	Pass	
	on design flexibility							
Limiting Fabric St								
2 Fabric U-values								
Element		Averag			Highest	- >		
External w		•	ax. 0.30)	(0.21 (max. 0.7	0)	Pass	
Party wall		0.00 (max. 0.20) 0.11 (max. 0.25)		,	-	0)	Pass	
Floor		•	,		0.11 (max. 0.7	*	Pass	
Roof		,	ax. 0.20) ax. 2.00)		0.18 (max. 0.3	*	Pass	
Openings	ring	1.28 (M	ax. 2.00)	-	1.30 (max. 3.3	O)	Pass	
2a Thermal bridg			al 4000 111					
	ging calculated from li	near therm	ai transmitt	ances for each ju	unction			
3 Air permeabilit			4.55.4.5			2.111 22 = = =		
Air permeability at 50 pascals				sign value)		m ³ /(h.m ²) @ 50 Pa		
Maximum			10.0			$m^3/(h.m^2) @ 50 P$	a Pass	

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Heat pump with radiators or underfloor - Electric Vaillant aroTHERM 5kW VWL 55/3 A 230v				
Secondary heating system	None				
5 Cylinder insulation					
Hot water storage	Measured cylinder loss: 1.42 kWh/day Permitted by DBSCG 2.30	Pass			
Primary pipework insulated	Yes	Pass			
<u>6 Controls</u>					
Space heating controls	Time and temperature zone control				
Hot water controls	Cylinderstat	Pass			
	Independent timer for DHW	Pass			
7 Low energy lights					
Percentage of fixed lights with low-energy fittings	100 %				
Minimum	75 %	Pass			
8 Mechanical ventilation					
Not applicable					
Criterion 3 – Limiting the effects of heat gains in sumn	ner				
9 Summertime temperature					
Overheating risk (Southern England)	Not significant	Pass			
Based on:					
Overshading	Average				
Windows facing North East	10.05 m ² , No overhang				
Windows facing South East	8.37 m², No overhang				
Windows facing South West	6.20 m², No overhang				
Air change rate	8.00 ach				
Blinds/curtains	None				
Criterion 4 – Building performance consistent with DE	R and DFEE rate				
Party Walls					
Туре	U-value				
Filled Cavity with Edge Sealing	0.00 W/m ²	K Pass			
Air permeability and pressure testing					
3 Air permeability	2// 2/ 2				
Air permeability at 50 pascals	4.50 (design value) m³/(h.m²) @				
Maximum	10.0 m³/(h.m²) @	50 Pa Pass			
10 Key features					
Party wall U-value	0.00 W/m²				
Roof U-value	0.10 W/m²				
Floor U-value	0.11 W/m²				
Door U-value	1.10 W/m²				
Door U-value	1.00 W/m ²	(

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£207	B 87	B 89	Recommended
Photovoltaic	£3,500 - £5,500	£779	A 96	A 96	Recommended
Wind turbine			0	0	Not applicable
Totals	£7,500 - £11,500	£986	A 96	A 96	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

