PREDICTED ENERGY ASSESSMENT
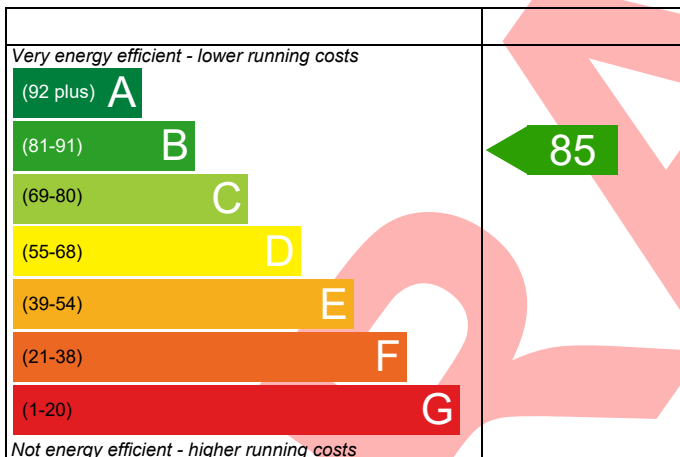
Design SAP
elmhurst energy

CLA, Plot 29, Sweet Hill,
Southwell,
Portland,
Dorset,
DT5

Dwelling type:	House, Semi-Detached
Date of assessment:	09/03/2023
Produced by:	Resi Resolve
Total floor area:	97.41 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.

The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO_2) emissions.
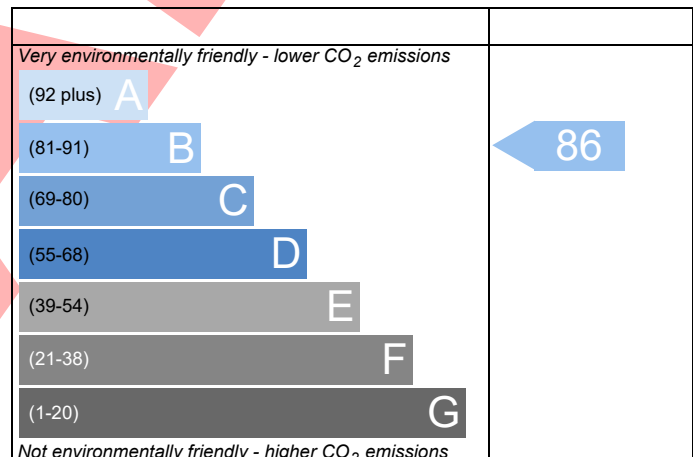
Energy Efficiency Rating

Very energy efficient - lower running costs

(92 plus)	A
(81-91)	B
(69-80)	C
(55-68)	D
(39-54)	E
(21-38)	F
(1-20)	G

85

Not energy efficient - higher running costs

England   EU Directive 2002/91/EC

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO_2) Rating

Very environmentally friendly - lower CO_2 emissions

(92 plus)	A
(81-91)	B
(69-80)	C
(55-68)	D
(39-54)	E
(21-38)	F
(1-20)	G

86

Not environmentally friendly - higher CO_2 emissions

England   EU Directive 2002/91/EC

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO_2) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

elmhurst energy

Regs Region: England
Elmhurst Energy Systems
SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE
Calculation Type: New Build (As Designed)

Design SAP
elmhurst energy

Property Reference	KOO/0002/23 029		Issued on Date	09/03/2023

Assessment Reference	001	Prop Type Ref	CLA

Property	CLA, Plot 29, Sweet Hill, Southwell, Portland, Dorset, DT5

SAP Rating	85 B	DER	16.49	TER	26.43
Environmental	86 B	% DER<TER		37.61	
CO₂ Emissions (t/year)	1.32	DFEE	45.17	TFEE	55.03
General Requirements Compliance	Pass	% DFEE<TFEE		17.93	

Assessor Details	Mrs. Georgina O'Connor, Resi Resolve, Tel: 07748778047, georgie@resi-resolve.co.uk	Assessor ID	T293-0001
Client	Koori Limited, KOO		

SUMARY FOR INPUT DATA FOR New Build (As Designed)

Criterion 1 – Achieving the TER and TFEE rate

1a TER and DER

Fuel for main heating	Electricity	
Fuel factor	1.55 (electricity)	
Target Carbon Dioxide Emission Rate (TER)	26.43	kgCO₂/m²
Dwelling Carbon Dioxide Emission Rate (DER)	16.49	kgCO₂/m²	Pass
	-9.94 (-37.6%)	kgCO₂/m²

1b TFEE and DFEE

Target Fabric Energy Efficiency (TFEE)	55.03	kWh/m²/yr
Dwelling Fabric Energy Efficiency (DFEE)	45.17	kWh/m²/yr
	-9.8 (-17.8%)	kWh/m²/yr	Pass

Criterion 2 – Limits on design flexibility

Limiting Fabric Standards

2 Fabric U-values

Element	Average	Highest	
External wall	0.21 (max. 0.30)	0.21 (max. 0.70)	Pass
Party wall	0.00 (max. 0.20)	-	Pass
Floor	0.11 (max. 0.25)	0.11 (max. 0.70)	Pass
Roof	0.12 (max. 0.20)	0.17 (max. 0.35)	Pass
Openings	1.27 (max. 2.00)	1.30 (max. 3.30)	Pass

2a Thermal bridging

Thermal bridging calculated from linear thermal transmittances for each junction

3 Air permeability

Air permeability at 50 pascals	4.50 (design value)	m³/(h.m²) @ 50 Pa	
Maximum	10.0	m³/(h.m²) @ 50 Pa	Pass

Limiting System Efficiencies

4 Heating efficiency

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

BUILDING REGULATION COMPLIANCE
Calculation Type: New Build (As Designed)

Main heating system	Heat pump with radiators or underfloor - Electric Vaillant aroTHERM 5kW VWL 55/3 A 230v	
Secondary heating system	None	

5 Cylinder insulation

Hot water storage	Measured cylinder loss: 1.42 kWh/day Permitted by DBSCG 2.30	Pass
Primary pipework insulated	Yes	Pass

6 Controls

Space heating controls	Time and temperature zone control	Pass
Hot water controls	Cylinderstat	Pass
	Independent timer for DHW	Pass

7 Low energy lights

Percentage of fixed lights with low-energy fittings	100	%	
Minimum	75	%	Pass

8 Mechanical ventilation

Not applicable

Criterion 3 – Limiting the effects of heat gains in summer

9 Summertime temperature

Overheating risk (Southern England)	Not significant	Pass

Based on:

Overshading	Average
Windows facing North East	8.89 m², No overhang
Windows facing South West	3.78 m², No overhang
Air change rate	8.00 ach
Blinds/curtains	None

Criterion 4 – Building performance consistent with DER and DFEE rate

Party Walls

Type	U-value		
Filled Cavity with Edge Sealing	0.00	W/m²K	Pass

Air permeability and pressure testing

3 Air permeability

Air permeability at 50 pascals	4.50 (design value)	m³/(h.m²) @ 50 Pa	
Maximum	10.0	m³/(h.m²) @ 50 Pa	Pass

10 Key features

Party wall U-value	0.00	W/m²K
Roof U-value	0.10	W/m²K
Floor U-value	0.11	W/m²K
Door U-value	1.10	W/m²K
Door U-value	1.00	W/m²K
Thermal bridging y-value	0.038	W/m²K

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

RECOMMENDATIONS

	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£203	B 88	B 89	Recommended
Photovoltaic	£3,500 - £5,500	£779	A 97	A 97	Recommended
Wind turbine			0	0	Not applicable
Totals	**£7,500 - £11,500**	**£983**	**A 97**	**A 97**	