PREDICTED ENERGY ASSESSMENT



CLA, Plot 30, Sweet Hill,


Southwell, Portland, Dorset, DT5 Dwelling type: House, Semi-Detached

Date of assessment: 09/03/2023
Produced by: Resi Resolve
Total floor area: 97.41 m²

This document is a Predicted Energy Assessment for properties marketed when they are incomplete. It includes a predicted energy rating which might not represent the final energy rating of the property on completion. Once the property is completed, this rating will be updated and an official Energy Performance Certificate will be created for the property. This will include more detailed information about the energy performance of the completed property.


The energy performance has been assessed using the Government approved SAP2012 methodology and is rated in terms of the energy use per square meter of floor area; the energy efficiency is based on fuel costs and the environmental impact is based on carbon dioxide (CO₂) emissions.

Energy Efficiency Rating

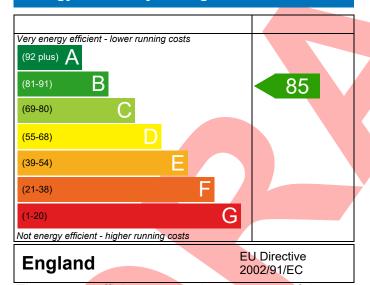

The energy efficiency rating is a measure of the overall efficiency of a home. The higher the rating the more energy efficient the home is and the lower the fuel bills are likely to be.

Environmental Impact (CO₂) Rating

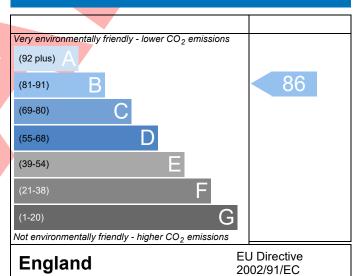

The environmental impact rating is a measure of a home's impact on the environment in terms of carbon dioxide (CO₂) emissions. The higher the rating the less impact it has on the environment.

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Property Reference KOO/0002/23 030				Issued on Date	09/03/2023
Assessment 001		Pro	p Type Ref	CLA	
Reference					
Property CLA, Plot 30, Sweet Hill, S	Southwell, Por	tland, Dorset, DT5			
SAP Rating	85 B	DER	16.49	TER	26.43
Environmental	86 B	% DER <ter< td=""><td></td><td>37.61</td><td></td></ter<>		37.61	
CO ₂ Emissions (t/year)	1.32	DFEE	45.17	TFEE	55.03
General Requirements Compliance	Pass	% DFEE <tfee< td=""><td></td><td>17.93</td><td></td></tfee<>		17.93	
Assessor Details Mrs. Georgina O'Connor, Res	si Resolve, Tel:	0774877804 7 , geo	orgie@resi-	Assessor ID	T293-0001
resolve.co.uk					
Client Koori Limited, KOO					
SUMARY FOR INPUT DATA FOR New Build (As De	signed)				
Criterion 1 – Achieving the TER and TFEE rate					
1a TER and DER					
Fuel for main heating	Electricit	су			
Fuel factor	1.55 (ele	ectricity)			
Target Carbon Dioxide Emission Rate (TER)	26.43			kgCO ₂ /m ²	
Dwelling Carbon Dioxide Emission Rate (DER)	16.49			kgCO ₂ /m ²	Pass
	-9.94 (-3	7.6%)		kgCO₂/m²	
1b TFEE and DFEE					
Target Fabric Energy Efficiency (TFEE)		55.03 kWh/m²/yr			
Dwelling Fabric Energy Efficiency (DFEE)	45.17			kWh/m²/yr	
	-9.8 (-17	.8%)		kWh/m²/yr	Pass
Criterion 2 – Limits on design flexibility					
Limiting Fabric Standards					
2 Fabric U-values					
Element	_		ghest		
	(max. 0.30)	0.2	21 (max. 0.70	0)	Pass
	(max. 0.20)	-		- >	Pass
	(max. 0.25)		11 (max. 0.70	•	Pass
	,	(max. 0.20) 0.17 (max. 0.35)			Pass
	(max. 2.00)	1.3	30 (max. 3.30	U)	Pass
2a Thermal bridging					
Thermal bridging calculated from linear the	ermal transmit	tances for each jun	iction		
3 Air permeability					
Air permeability at 50 pascals		sign value)		m ³ /(h.m ²) @ 50 P	
Maximum	10.0			m³/(h.m²) @ 50 P	a Pass
Limiting System Efficiencies					

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



4 Heating efficiency

Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

BUILDING REGULATION COMPLIANCE Calculation Type: New Build (As Designed)



Main heating system	Heat pump with radiators or underfloor - Electric Vaillant aroTHERM 5kW VWL 55/3 A 230v				
Secondary heating system	None				
5 Cylinder insulation					
Hot water storage	Measured cylinder loss: 1.42 kWh/day Permitted by DBSCG 2.30	Pass			
Primary pipework insulated	Yes	Pass			
<u>6 Controls</u>					
Space heating controls	Time and temperature zone control	Pass			
Hot water controls	Cylinderstat	Pass			
	Independent timer for DHW	Pass			
7 Low energy lights					
Percentage of fixed lights with low-energy fittings	100 %				
Minimum	75 %	Pass			
8 Mechanical ventilation					
Not applicable					
Criterion 3 – Limiting the effects of heat gains in sur	nmer				
9 Summertime temperature					
Overheating risk (Southern England)	Not significant	Pass			
Based on:					
Overshading	Average				
Windows facing North East Windows facing South West	8.89 m², No overhang 3.78 m², No overhang				
Air change rate	8.00 ach				
Blinds/curtains	None				
Criterion 4 – Building performance consistent with	DER and DFEE rate				
Party Walls					
Туре	U-value				
Filled Cavity with Edge Sealing	0.00 W/m ² K	Pass			
Air permeability and pressure testing					
3 Air permeability					
Air permeability at 50 pascals	4.50 (design value) m ³ /(h.m ²) @ 50 Pa				
Maximum	10.0 m ³ /(h.m ²) @ 50 Pa	Pass			
10 Key features					
Party wall U-value	0.00 W/m²K				
Roof U-value	0.10 W/m²K				
Floor U-value	0.11 W/m²K				
Door U-value	1.10 W/m²K				
Door U-value	1.00 W/m²K				
Thermal bridging y-value	0.038 W/m²K				

This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.



Regs Region: England Elmhurst Energy Systems SAP2012 Calculator (Design System) version 4.14r19

RECOMMENDATIONS



	Typical cost	Typical savings per year	Energy efficiency	Environmental impact	Result
Low energy lights			0	0	Already installed
Solar water heating	£4,000 - £6,000	£203	B 88	B 89	Recommended
Photovoltaic	£3,500 - £5,500	£779	A 97	A 97	Recommended
Wind turbine			0	0	Not applicable
Totals	£7.500 - £11.500	£983	A 97	A 97	



This report has not been submitted through the Elmhurst Energy members' portal, therefore results are subject to change when the dwelling is completed.

